



FLOATLESS RELAY: APR-3



PRODUCT SPECIFICATIONS

CLASSIFICATION		REV,PREVENTING RELAY
MODEL		APR-3
DIMESIONS		50HЎБ40WЎБ57.5D
MOUITING	SURFACE(-N)	PF083A PF085A
	FLUSH(-Y)	P3G-08 US-08
FUNCTIONS		Protecting threepphase induction motor reverse relay 220V sourece with surece with surge absorber and high voltage protecting
RATED VOLTAGE		AC(V):220,240,380,415,440,50/60Hz
INDICATOR OPERATING		-
OCUPTNPTUATCT	MODEL	APR-3
	TIME LIMIT IC	10A
LIFE	MECHANICAL	5ЎБ10 ⁶ times
	ELECTRICAL	10 ⁵ times
SETTING ERROR		-
RESET TIME		-
CONSUMED POWER		2VA
AMBIENT TEMPERTURE		-10ЎжЎ«+55Ўж
AMBIENT TEMPERTURE		48Ў«85%RH
WEIGHT		90

CONNECTION DIAGRAMS&TIMING CHART APR-3

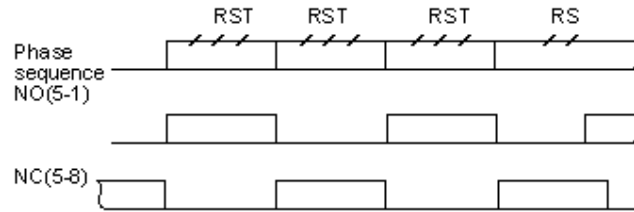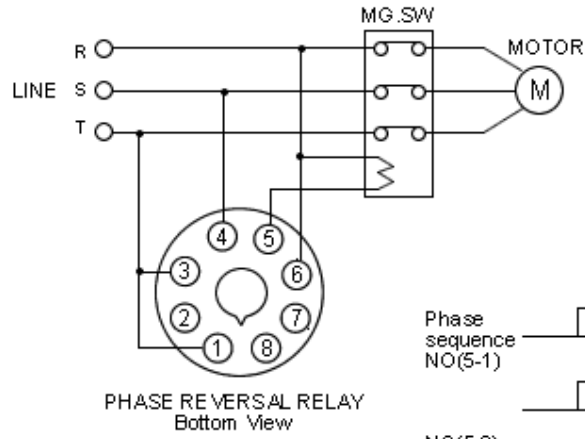

DIMENSIONS APR-3

